


# The GENERAL II Belt Drive

## VERTICAL FORM/FILL/SEAL PACKAGING MACHINE



**MODEL 48 WAP**  
WITH AUGER FILLER

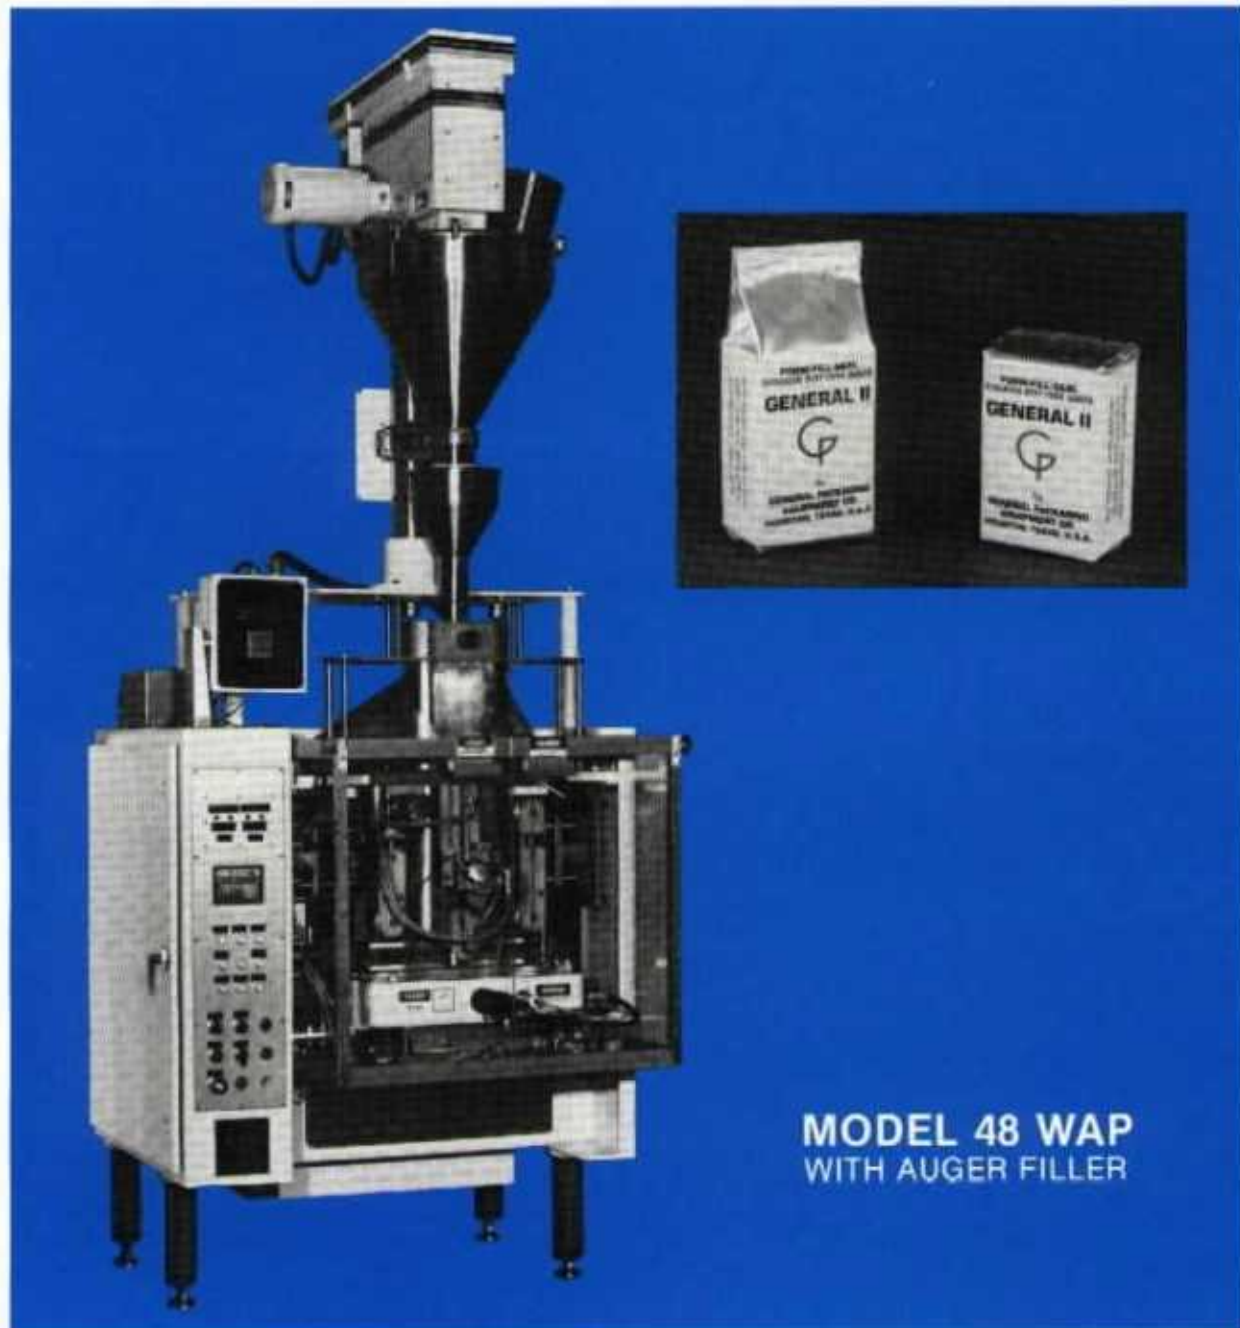

**GENERAL PACKAGING EQUIPMENT CO.**

6048 WESTVIEW DRIVE • HOUSTON, TEXAS 77055

713/886-4331 • FAX: 713/883-3987

# The GENERAL II Belt Drive

General Packaging Equipment Co. has extended its tradition of simple and rugged vertical form/fill/seal machines to a belt drive machine for pillow, square bottom, gusseted, and three side seal bags.

Outstanding features of this machine include:

- A heavy duty film transport system with stepper drive motors for supported or unsupported packaging materials.
- Vacuum film gripping belts that handle a wider range of standard packaging materials with less belt wear. Friction belts available for porous materials.
- Easier and quicker change-over from one size to another. No tools required.
- Hydraulically powered seal bars apply the high pressures required to seal multiple layers of heavy packaging materials.
- A microprocessor control system with:
  - Touch screen for data display. Sealed keypad for data entry.
  - Display of set point and actual seal temperatures.
  - Display of timing values and function On/Off status.
  - Storage and retrieval of programmed values for multiple product/package sizes.
- Help screens to assist in operation and trouble shooting.
- Machine fault indications.
- Programmed interfacing with Net Weighers, Combination Weighers, Auger Fillers, Volumetric Cup Fillers, Liquid Fillers, and special feeders.
- Optional computer interfacing.
- Rugged welded frame constructed of ½" and ¼" mild steel. Stainless steel available.
- Accessories include:
  - Gas relief valve or fitment applicators.
  - Roll leaf or ink printers.
  - Modified atmosphere packaging.
  - Interfacing with General's AUTOVAC automatic vacuum sealers or cartoning machines.
  - Bag-in-bag Models.
  - Special designs for special applications.

## PACKAGE SIZE RANGES

### PILLOW, THREE SIDE SEAL

	Width	Length
Regular Model	Minimum: 1½" (38mm)	3" (76mm)
Wide Model	Maximum: 8" (203mm)	15" (380mm)
Wide Model	Maximum: 14" (356mm)	36" (762mm)

### SQUARE BOTTOM & GUSSETED

	Face	Side	Length
Regular Model	Minimum: 2" (51mm)	1" (25mm)	4" (102mm)
Wide Model	Maximum: 7" (178mm)	4½" (114mm)	15" (380mm)
Wide Model	Maximum: 13" (330mm)	5½" (140mm)	30" (752mm)

- Note. 1) Face must exceed Side by 1" (25mm).  
2) Regular Model—Face plus Side must not exceed 8" (203mm).  
Wide Model—Face plus Side must not exceed 14" (356mm).

All specifications are subject to change without notice.

FOR MORE INFORMATION CONTACT:

**GENERAL PACKAGING EQUIPMENT CO.**

6048 WESTVIEW DRIVE • HOUSTON, TEXAS 77055

713/686-4331 • FAX: 713/683-3967



793/1000